

## AD Access Door

### ■ Description

ASLI Access Doors (AD) are designed as an easy re-sealable way of gaining access to rigid air conditioning ducts for equipment maintenance and cleaning purposes. Equipment such as dampers, VAV terminals, filters, heaters can be accessible through ASLI Access Door.

### ■ Materials


- Frame: 0.7mm thickness galvanized steel.
- Panel: 0.7mm thickness galvanized steel.
- Seal: PE foam gasket.
- Door Lock: Aluminum.
- Insulation: 25mm, 32kg/m<sup>3</sup> fiber glass.

### ■ Features


- Gasket formed to ensure an air tight seal between panel and frame.
- Sash fasteners lock the panel securely on the frame and unlock to remove the panel easily. The design of the hook and cam provides an airtight seal between the panel and the frame.
- Internal insulation is sealed within the panel to attenuate noises and prevents condensation, heat lost or gained.

### ■ Standard Sizes

- 300X300, 400X400, 450X450 (Neck Size, mmXmm)
- Non standard sizes are available upon request.

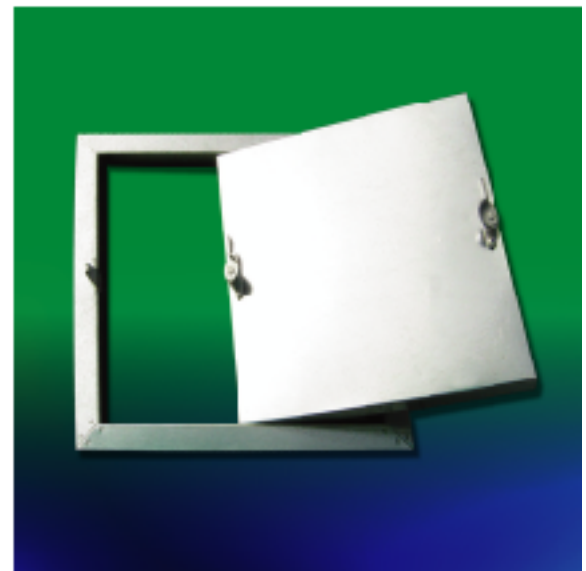

### ■ AD Construction Illustrations

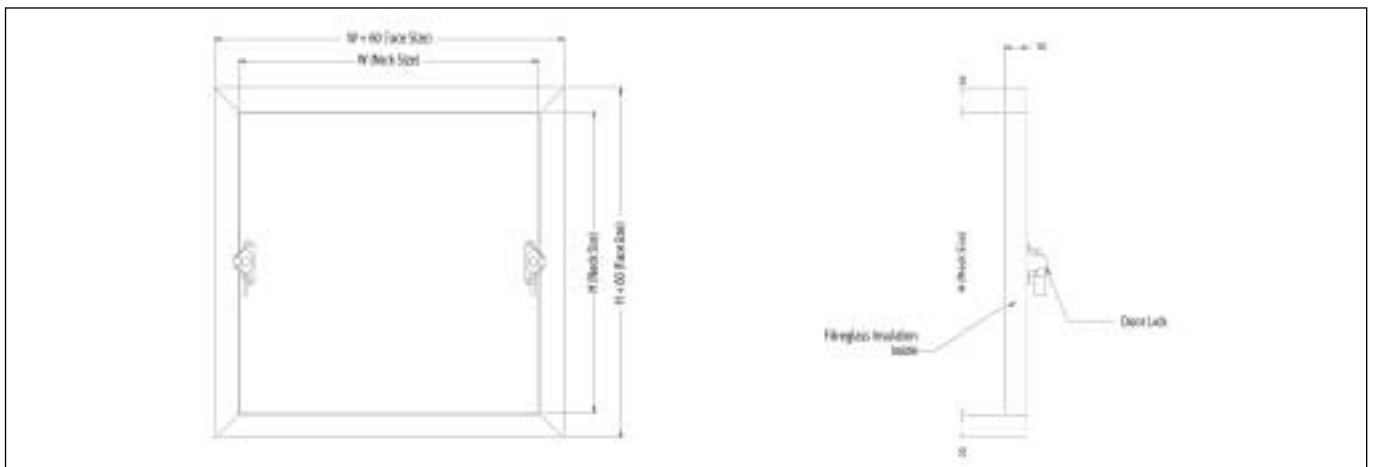

### ■ AD Order Code

Model	Neck(N)/ Face(F) Size	Dimension
AD	N	450mmX450mm

Example: AD – N450mmX450mm

All stated specifications are updated at the printing date and subject to change without notice or obligation. The actual product might differ from pictures shown.